



PL-S 2 Pin

PL-S 13W/840/2P 1CT/25

PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.


Product data

General Information	
Cap-Base	GX23 [GX23]
Life to 50% Failures (Nom)	8000 h
Light Technical	
Color Code	840 [CCT of 4000K]
Luminous Flux (Nom)	900 lm
Color Designation	Cool White (CW)
Lumen Maintenance 2000 h (Nom)	85 %
Lumen Maintenance 5000 h (Nom)	80 %
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	66 lm/W
Color Rendering Index (Nom)	82
Operating and Electrical	
Power (Rated) (Nom)	13.0 W
Lamp Current (Nom)	0.290 A
Voltage (Nom)	56 V
Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Cap-Base Information	2 Pins
Approval and Application	
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	1.4 mg
Product Data	
Full product code	871150063822900
Order product name	PL-S 13W/840/2P 1CT/25
EAN/UPC - Product	8711500638229
Order code	927902884065
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927902884065
Net Weight (Piece)	0.035 kg

PL-S 2 Pin


Dimensional drawing




PL-S 13W/840/2P

Product	D (max)	D1 (max)	C (max)
PL-S 13W/840/2P ICT/25	27.1 mm	13 mm	178.2 mm

Photometric data

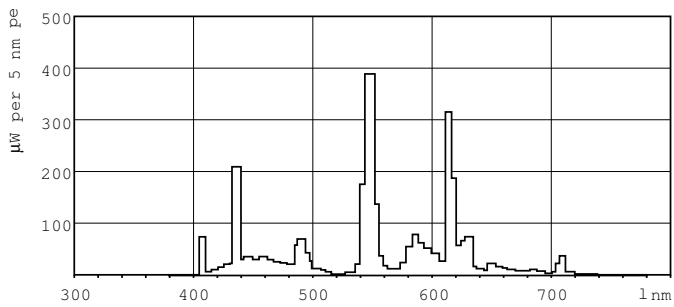

Lightcolor /840

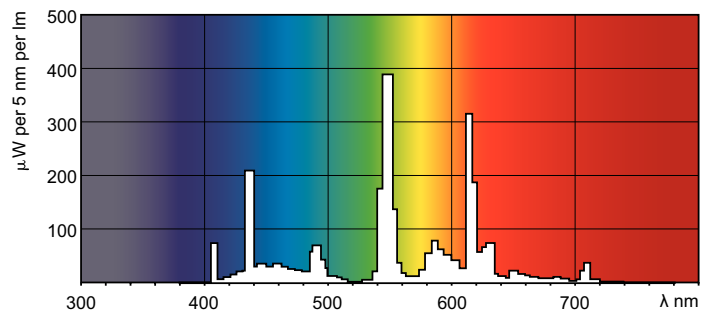

Lightcolor /840

